

HYDROCHEMICAL ANALYSIS OF SURFACE WATER AND INDUSTRIAL WASTE WATER IN KORBA INDUSTRIAL AREA IN AND AROUND KORBA DISTRICT, CHHATTISGARH, INDIA.

Dr. Manish Upadhyay*

HOD & Professor, Department of Chemistry Dr. C.V. Raman University. Kota, Bilaspur (C.G.).

Article Received on
23 May 2018,

Revised on 11 June 2018,
Accepted on 02 July 2018

DOI: 10.20959/wjpr201814-12832

***Corresponding Author**

Dr. Manish Upadhyay

HOD & Professor,

Department of Chemistry

Dr. C.V. Raman University.

Kota, Bilaspur (C.G.).

ABSTRACT

An investigation was undertaken to study chemical & physical properties of Effluents discharged from korba Industrial area. Industrial waste if discharged into surface water can give rise to significant deterioration in its quality. This paper presents groundwater quality of korba industrial area in korba City. Nine different locations were selected for the study and compared. The parameters studied were pH, total alkalinity, total hardness, turbidity, chloride, sulphate, fluoride, total dissolved solids and conductivity. From overall analysis, it was observed that there was a slight fluctuation in the physico-chemical parameters among the water samples studied. Comparison of

the physico-chemical parameters of the water sample with WHO and ICMR limits showed that the Surface water is highly contaminated and account for health hazards for human use.

KEYWORDS: Investigation, discharged, physico-chemical parameters, contaminate.

INTRODUCTION

Water pollution is a major global problem which requires ongoing evaluation and revision of water resource policy at all levels (international down to individual aquifers and wells). It has been suggested that it is the leading worldwide cause of deaths and diseases, and that it accounts for the deaths of more than 14,000 people daily. An estimated 700 million Indians have no access to a proper toilet, and 1,000 Indian children die of diarrheal sickness every day. Some 90% of cities suffer from some degree of water pollution and nearly 500 million people lack access to safe drinking water.^[1] In addition to the acute problems of water

pollution in developing countries, developed countries continue to struggle with pollution problems as well. The specific contaminants leading to pollution in water include a wide spectrum of chemicals, pathogens, and physical or sensory changes such as elevated temperature and discoloration. While many of the chemicals and substances that are regulated may be naturally occurring (calcium, sodium, iron, manganese, etc.) the concentration is often the key in determining what is a natural component of water, and what is a contaminant. High concentrations of naturally-occurring substances can have negative impacts on aquatic flora and fauna.

Oxygen-depleting substances may be natural materials, such as plant matter (e.g. leaves and grass) as well^[2] as man-made chemicals. Other natural and anthropogenic substances may cause turbidity (cloudiness) which blocks light and disrupts plant growth, and clogs the gills of some fish species. Many of the chemical substances are toxic. Pathogens can produce waterborne diseases in either human or animal hosts. Alteration of water's physical chemistry includes acidity (change in pH), electrical conductivity, temperature, and eutrophication.^[3] Eutrophication is an increase in the concentration of chemical nutrients in an ecosystem to an extent that increases in the primary productivity of the ecosystem. Depending on the degree of eutrophication, subsequent negative environmental effects such as anoxia (oxygen depletion) and severe reductions in water quality may occur, affecting fish and other animal populations.^[4]

Study Area

Korba industrial area is part of Korba Dist. situated at 22-22' N and 82-42'E latitude with the 304.8 meter above sea level. Underground water is the only source of water for the industrial areas of Korba the groundwater quality of Korba is continuously degrading due to industrial activities and the soils of the nearby fields are also being affected. Therefore, we have decided to analyze its effluents so that some remedies for the improvement could be possible.

MATERIAL AND METHOD

Effluents samples were collected from ten different locations of Korba industrial area during the post-rainy season (Oct-Nov 2012). Borosilicate glassware, distilled water and good quality reagents were used throughout the testing. Samples were collected in sterilized screw-capped polyethylene bottles of one litre capacity and analyzed in laboratory for their physico-chemical parameters. Samples collected from study sites were properly labeled and a record was prepared (Table 1). The various physiochemical parameters were analyzed^[5] (Table 2)

and health effects of chemical parameters are reported (Table 3). Total alkalinities of the water samples were determined by titrating with N/50 H_2SO_4 using phenolphthalein and methyl orange as indicators. The chloride ions were generally determined by titrating the water samples against a standard solution of $AgNO_3$ using potassium chromate as an indicator. The conductivity of the water sample was measured using the conductometry method. The total hardness of the water samples was determined by complexometric titration with EDTA using Erichrome black-T as an indicator. Sulphate and fluoride of the water samples were estimated by UV-visible spectrophotometer. TDS of water sample were measured using gravimetric method.^[6]

Table 1: Sampling points.

Sampling place	Sampling point number
NTPC	1
CSEB (E)	2
CSEB (W)	3
BALCO ALUMINA	4
BALCO FABRICATION	5
BALCO ANODE PASTE	6
River Hasdeo up steam	7
RiverHasdeo Barrage	8
River Hasdeo Down steam	9

Table 2: Methods used for estimation of various physicochemical Parameters.^[7]

Parameters	Method
Temperature	Thermometer
pH	pH metry
Total Alkalinity	Conductometry
Total Hardness	EDTA Titration
Turbidity	Turbidity Meter
Chloride	Silver nitrate Method
Sulphate	Turbidometric Method
Fluoride Ion	spectrophotometer
Total Dissolved Solids	Conductivity Meter
Conductivity	Conductometry

Table 3: Health effects of chemical parameters.

Parameters of water analysis	BIS Guideline Values (Max. allowable)	Potential health effects
pH	6.5-8.5	Affects mucous membrane; bitter taste; corrosion
Total Alkalinity	600mg/l	Boiled rice turns yellowish
Total Hardness	600mg/l	Poor lathering with soap; deterioration of the quality of clothes; scale forming
Chloride	1000mg/l	Taste affected; corrosion
Sulphate	400mg/l	Taste affected; gastro-intestinal irritation
Fluoride	1.5mg/l	Dental and skeletal fluorosis; non-skeletal manifestations
Total Dissolved Solids	200mg/l	Undesirable taste; gastro-intestinal irritation; corrosion or incrustation

Table 4: Physico-chemical parameters of sampled waters^[8]

Parameters	Sampling point								
	1	2	3	4	5	6	7	8	9
Temperature (0C)									
pH	8.10	8.97	8.55	8.47	7.98	8.0	7.90	7.75	8.0
Total Alkalinity (mg/l)	96	92	100	115	120	95	70	86	65
Total Hardness (mg/l)	100	90	98	94	86	96	84	82	80
Nitrate (mg/l)	1.21	1.0	0.92	1.34	1.1	0.8	1.2	0.92	0.90
Chloride (mg/l)	112	98	124	95	68	88	15	11	12
Sulphate (mg/l)	60	65	45	70	50	60	45	40	60
Fluoride (mg/l)	0.95	1.0	1.11	1.12	1.15	0.95	0.94	0.96	0.90
Total Solids (mg/l)	570	598	578	550	570	528	475	455	466
BOD	12	16	14	8	10	5	2.8	2.0	3.10

RESULT AND DISCUSSION

The sample collected from Korba industrial area was analyzed. The analysis (Table 3) of ground water samples includes the determination of concentration of inorganic constituents. The physico- chemical parameters, which were analyzed in post monsoon season Oct- Nov 2012, have been shown in Table 4. The desirable pH range necessary for drinking water is from 7.0 to 8.5. The pH value of water sample in the study area ranged from 7.75 to 8.97. On an average, pH of all samples was in desirable limit as prescribed for drinking water standard. This shows that pH of water sample was slightly alkaline.^[9]

Total alkalinity of water in terms of CaCO_3 varied from 65-120mg/l. The values of total alkalinity were comparatively moderate. The water for domestic use having alkalinity less than 100mg/l is safe. The high content of alkalinity is shown in the Table 4. Total hardness was found in the sample water ranges from 80-100mg/l, which shows that water is safe for drinking purpose. Hardness has no known adverse effects on health. However, maximum

permissible level prescribed by WHO for drinking water is 500 mg/l as set. According to some classifications, water having hardness up to 75mg/l is classified as soft, 76-150 mg/l is moderately soft, 151-300 mg/l as hard (Dufor & Becker,1964) and more than 300 mg/l as very hard. On this basis, the results show that all the samples were soft except sample 01 (Ravisankar & Poogothai 2008). (Fig.2)

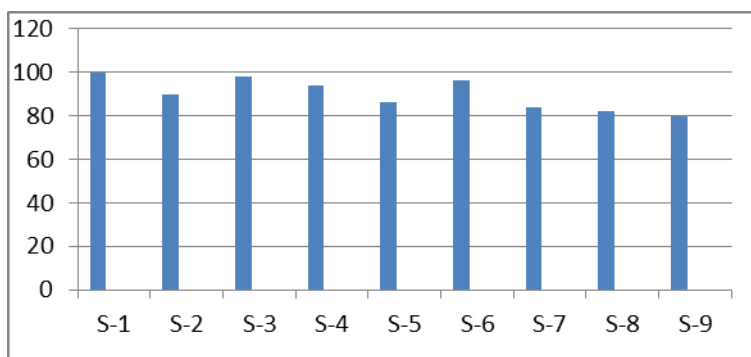


Figure 2: Total Hardness (mg/l).

Chloride content of the water samples was low in rainy season. According to WHO, maximum permissible limit for chloride is 500mg/l. The value observed in present study is in the range of permissible limit (Ravisankar & Poogothai, 2008) (Fig.3). The sulphate content varies between 40 to 70 mg/l and the fluoride content varies between 0.9 to 1.5 mg/l. The sulphate and fluoride values were also found to be within the prescribed limits. Total dissolved solids (TDS) is a measure of the combined content of all inorganic and organic substances contained in a liquid in molecular, ionized or micro granular suspended form. The permissible limit of TDS of drinking water is 500 mg/l (WHO, 2004). The observation shows that the TDS is within the permissible range as prescribed by WHO (2004).

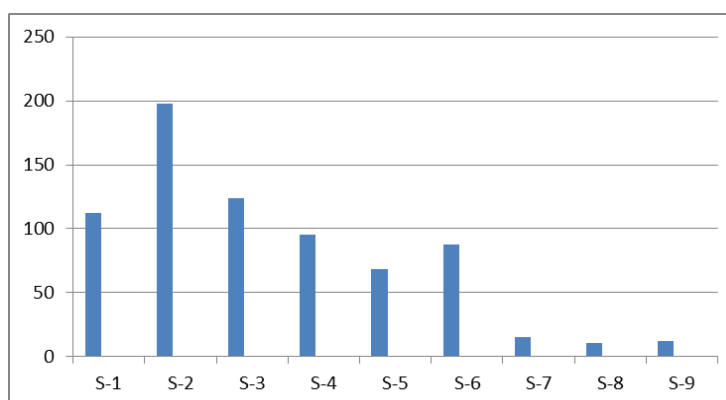


Figure 03: Chloride(mg/l).

CONCLUSION

The results of water investigation show that the waters of the study area are highly contaminated with total solids. As a result of high concentration of TS, water loses its potability and reduces the solubility of oxygen in water. Water of almost all study points is hardened contaminated because of this, people of Korba area are prone for the immediate health problems such as stomach diseases, gastric troubles etc.

ACKNOWLEDGEMENT

Author thankful to Principal Dr. C V Raman Institute of Science & Technology for providing necessary lab facility.

REFERENCES

1. APHA (1995), Standard methods for examination of water and waste water 19th edn. American Public health association , Washington , DC.
2. BIT (1995), Drinking water specification (First revision), I. S. 10500.
3. Tiwari R K et.al (1986) and Goel P.K., "chemical and Biological method for water pollution studies", Environmental Publication, Karad India.
4. Aruna Sharma et.al & T I Khan Organo –chlorine pesticides in irrigation water Jaipur city (India) Central Public Health and Environmental Engineering organization .Manual on water supply and Treatment , Ministry of works and housing Ne4w-Delhi.
5. Sorg. I J et.al, (1998). treatment technology to meet the primary drinking water regulation for inorganics (part-1)(q) . J Amwat works astt, 70(2): 105-112.
6. Singh, V.et.al (2004) and Chandel, C.P.S.,. The potability of groundwater in terms of Water Quality Index (WQ1) of Jaipur city. Cheml. Environ. Res, 13(3&4): 307-314.
7. ICMR-Indian council of medical research (1975), New Dealhi manual of quality of drinking water supply special report series no -44.
8. NEERI Publication, 1988 Manual on water and waste analysis.
9. Journal of environmental science and engineering, 2008; 175-178.